

# GEVA 75 Solenoid Operator 2/2, 3/2 Way NC, NO

## General Description

The GEVA 75 2/2, 3/2 Way, NC, NO operator is compatible with the 3/4-20 UNF operator seat.

Polyurethane encapsulated construction and exclusion of air assures complete sealing for the coil and lead wires entry.

Wet metal parts are made of passivated Stainless steel for maximum corrosion protection.

An efficient design makes it possible to achieve high pressures with a low inrush and holding current and wide voltage tolerance.



## Notes

- Coils for other voltages are available, please contact our technical sales department.
- Available with brass adaptor upon request.


## How to Order

Example : G75-O-2W1-1

Is a Geva 75 Operator, 2WNC, 24V AC.

Example : G75-O-1032-1

Is a Geva 75 Operator, 1/8" BSP, 3WNC, 1.2 orifice, 24V AC.

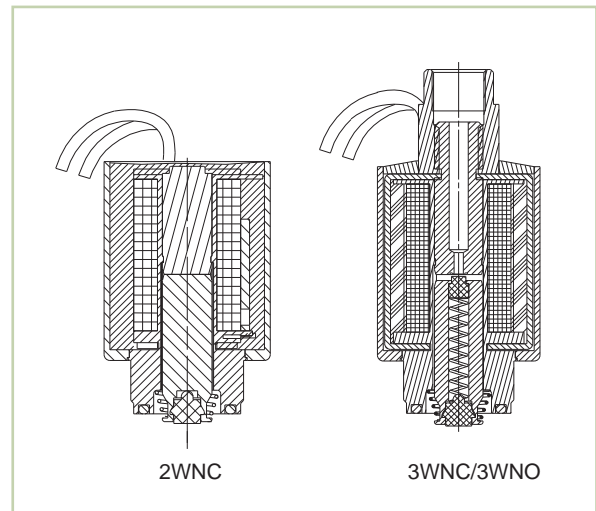

### 2W

G75-O	2W	Function	Voltage
		2WNC 1	24V AC 1 12V AC 3 12V DC 4 24V DC 5 110V AC <sup>(1)</sup> 7

### 3W

G75-O	Port	Function	Orifice	Voltage
	1/8" BSP 10 1/8" NPT 11	3WNC 3 3WNO 4	1 1 1.2 2 1.6 3	24V AC 1 12V AC 3 12V DC 4 24V DC 5 110V AC <sup>(1)</sup> 7

(1) 110V AC - available in 2/2W only